


WIRE LEGEND

- A YELLOW V.H.R. 6420 SOLID
- B BLACK
- C RED
- D BLUE FLEX
- E BROWN
- F GREEN
- G YELLOW
- H BLACK
- J RED
- K GREEN SOLID
- L #20 BARE TINNED CU. WIRE
- M SHILDED LEAD D-897B7
- N CABLE #89817
- O BROWN V.H.R. 6420 SOLID

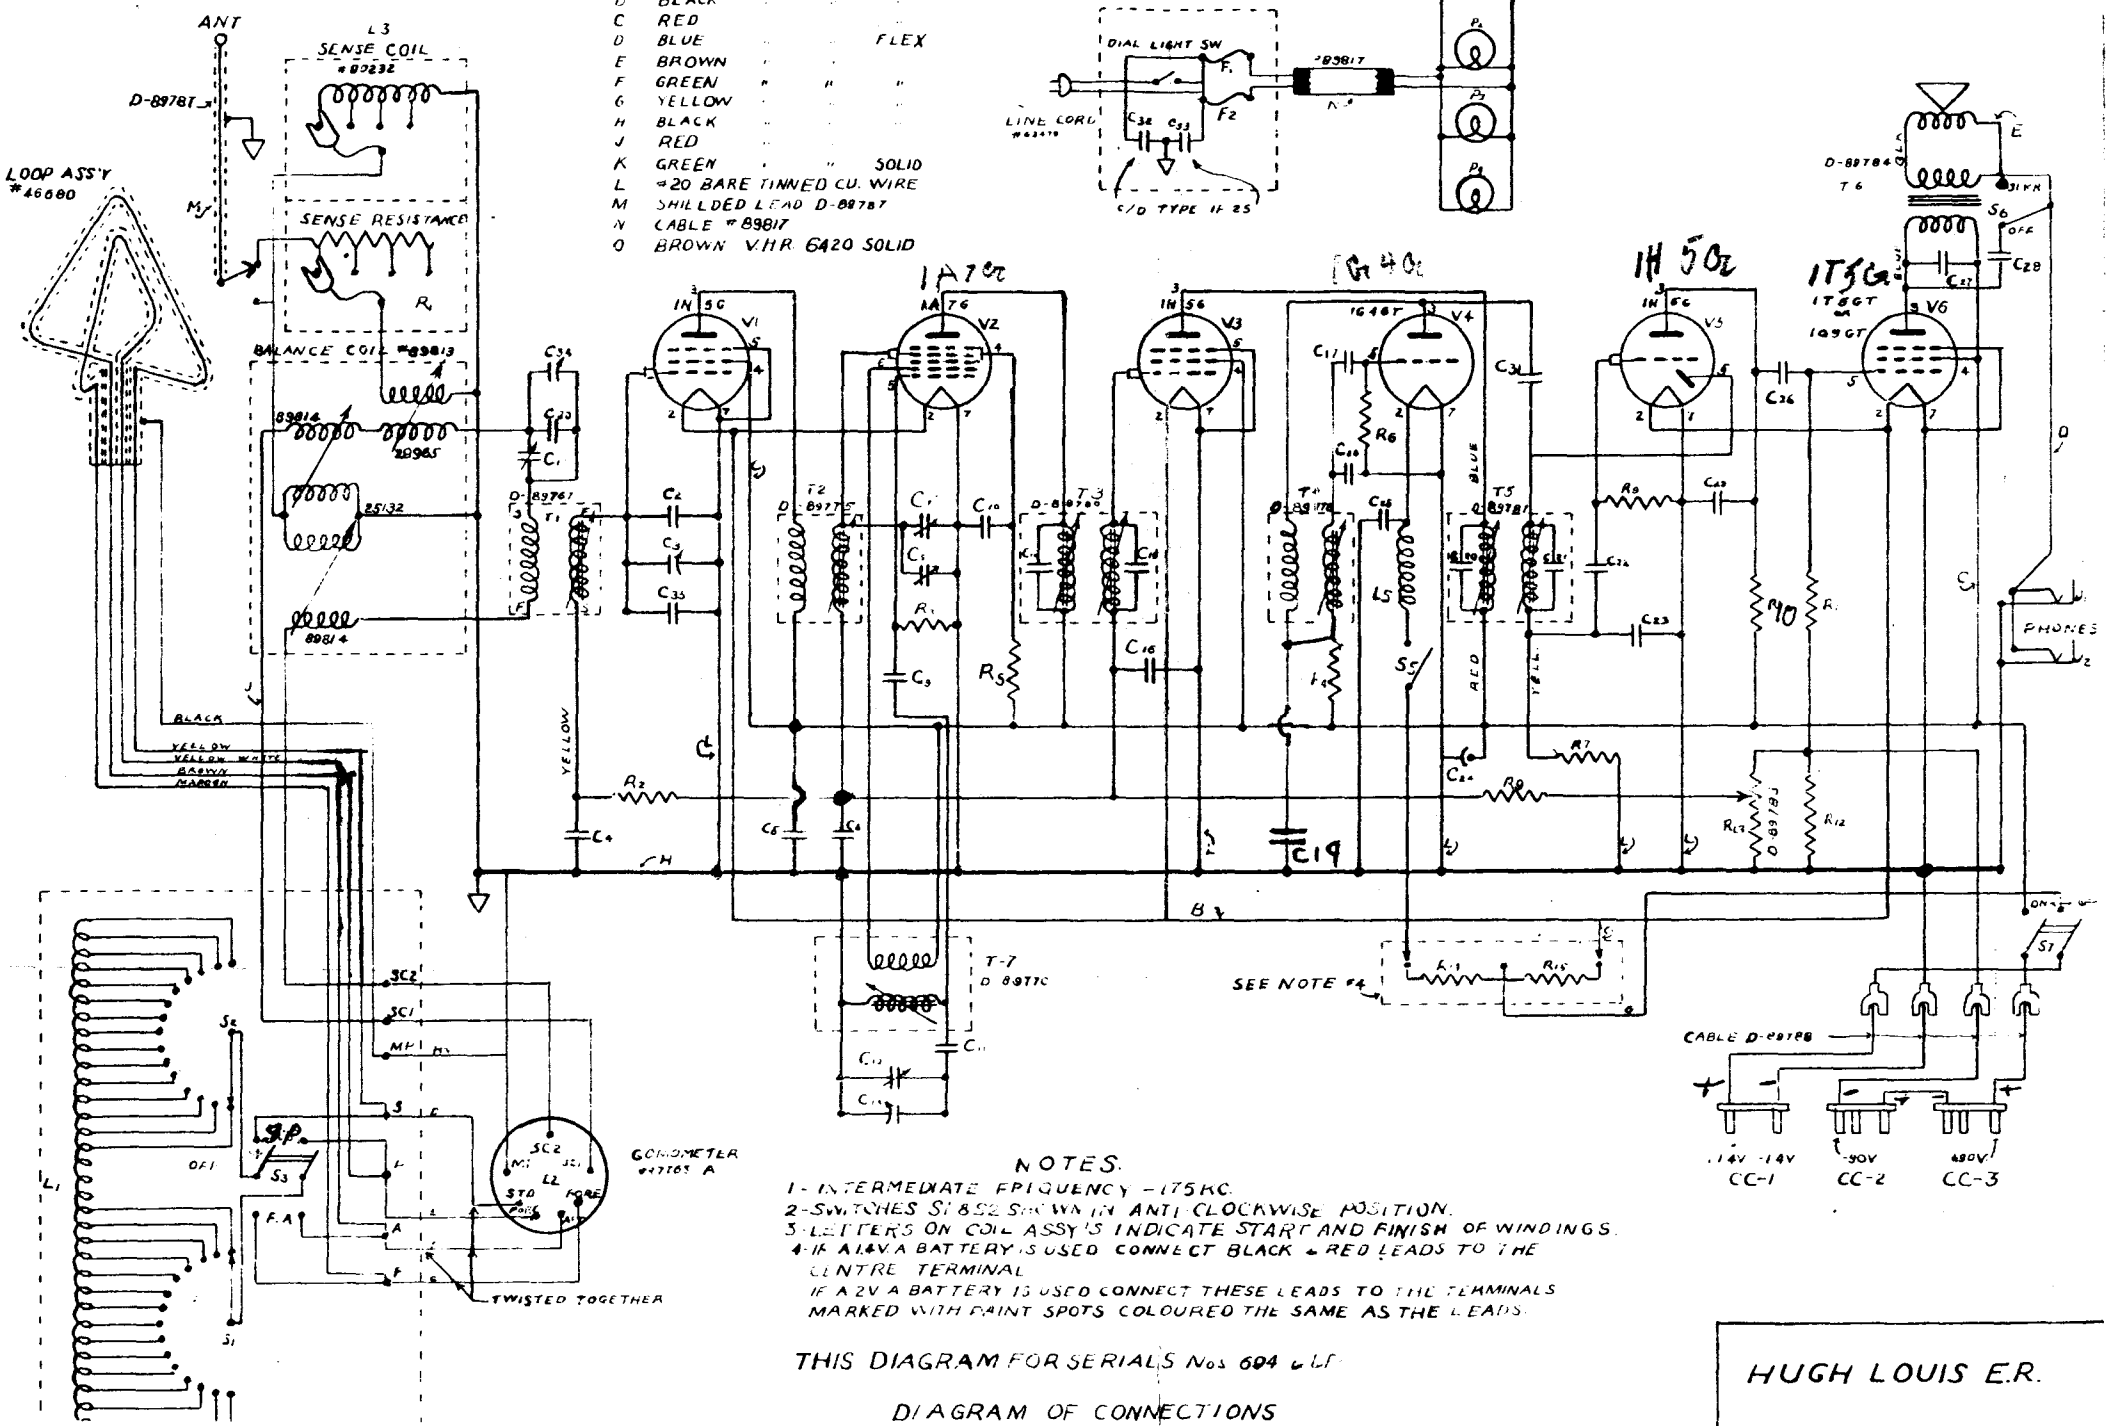

NOTES.

- 1- INTERMEDIATE FREQUENCY - 175KC.
- 2- SWITCHES S1 & S2 SHOWN IN ANTI CLOCKWISE POSITION.
- 3- LETTERS ON COIL ASSY'S INDICATE START AND FINISH OF WINDINGS.
- 4- IF ALVA BATTERY IS USED CONNECT BLACK & RED LEADS TO THE CENTRE TERMINAL
IF A 2V BATTERY IS USED CONNECT THESE LEADS TO THE TERMINALS MARKED WITH PAINT SPOTS COLOURED THE SAME AS THE LEADS.

THIS DIAGRAM FOR SERIALS Nos 694 & LF

DIAGRAM OF CONNECTIONS

HUGH LOUIS E.R.